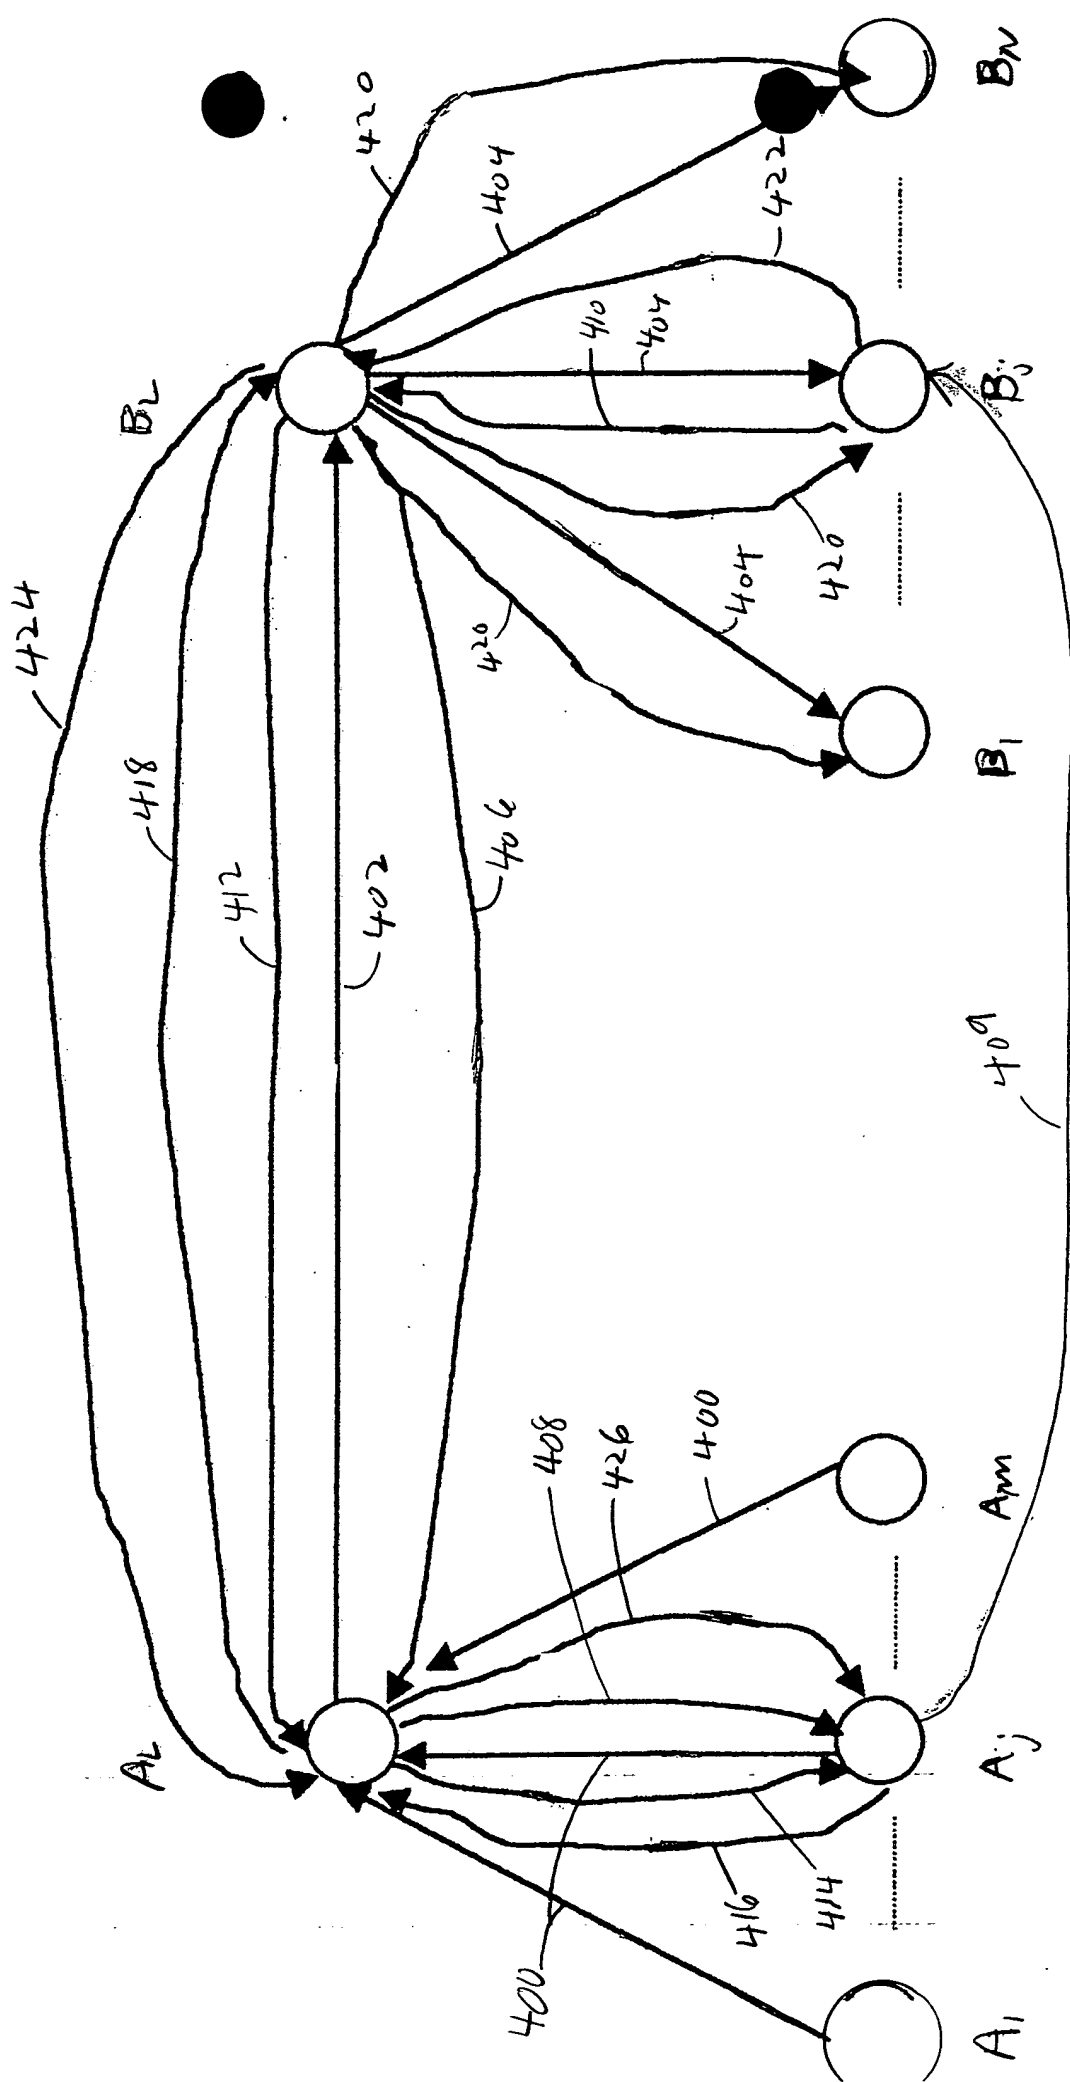


Figure 1

Byte K2 Bits 6,7,8 (Channel Status) Definition 12
111 = AIS-L
110 = RDI-L
101 = Not Used
100 = Not Used
011 = ET (Extra traffic on protection channel)
010 = Bridged and switched
001 = Bridged
000 = Idle

FIGURE 2

FIGURE 4



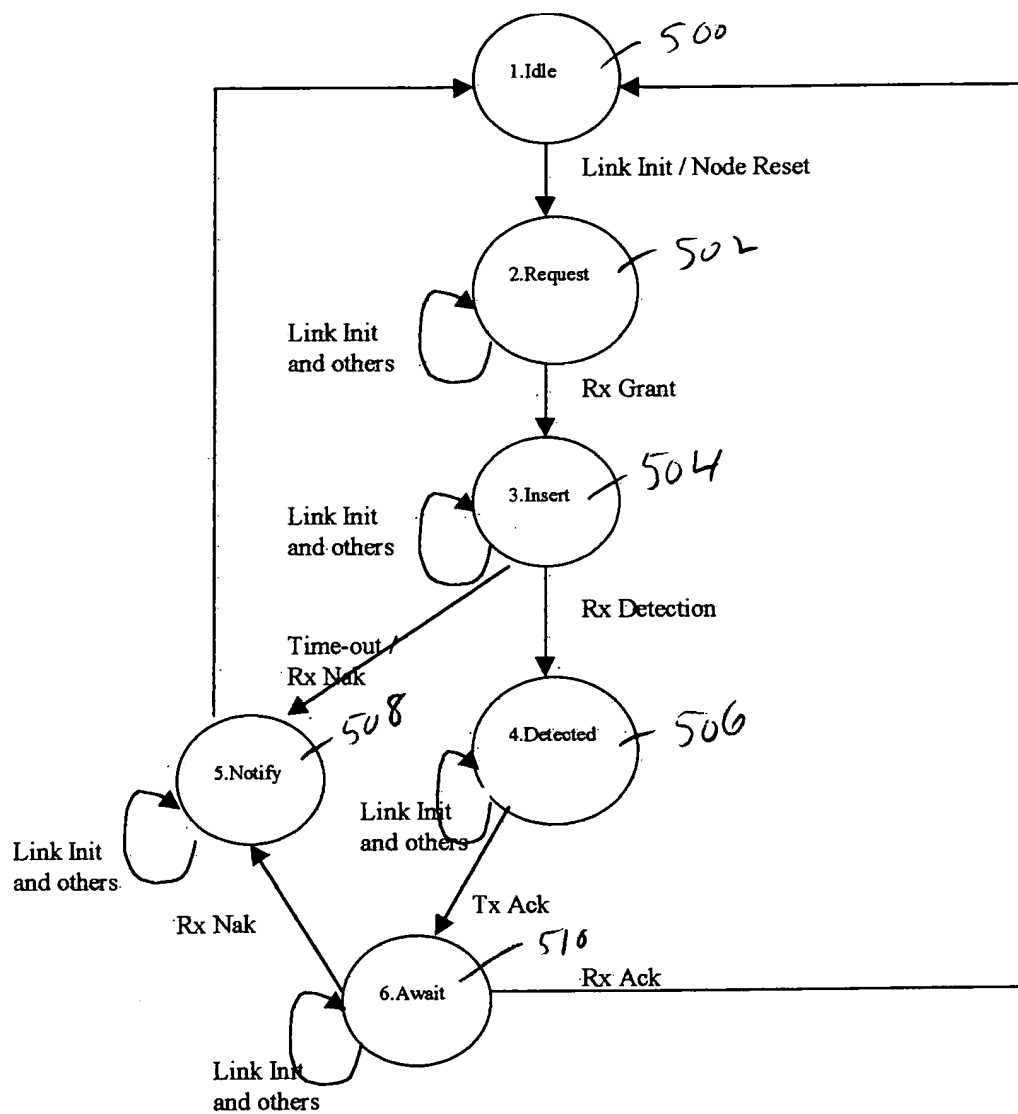


Figure 5:

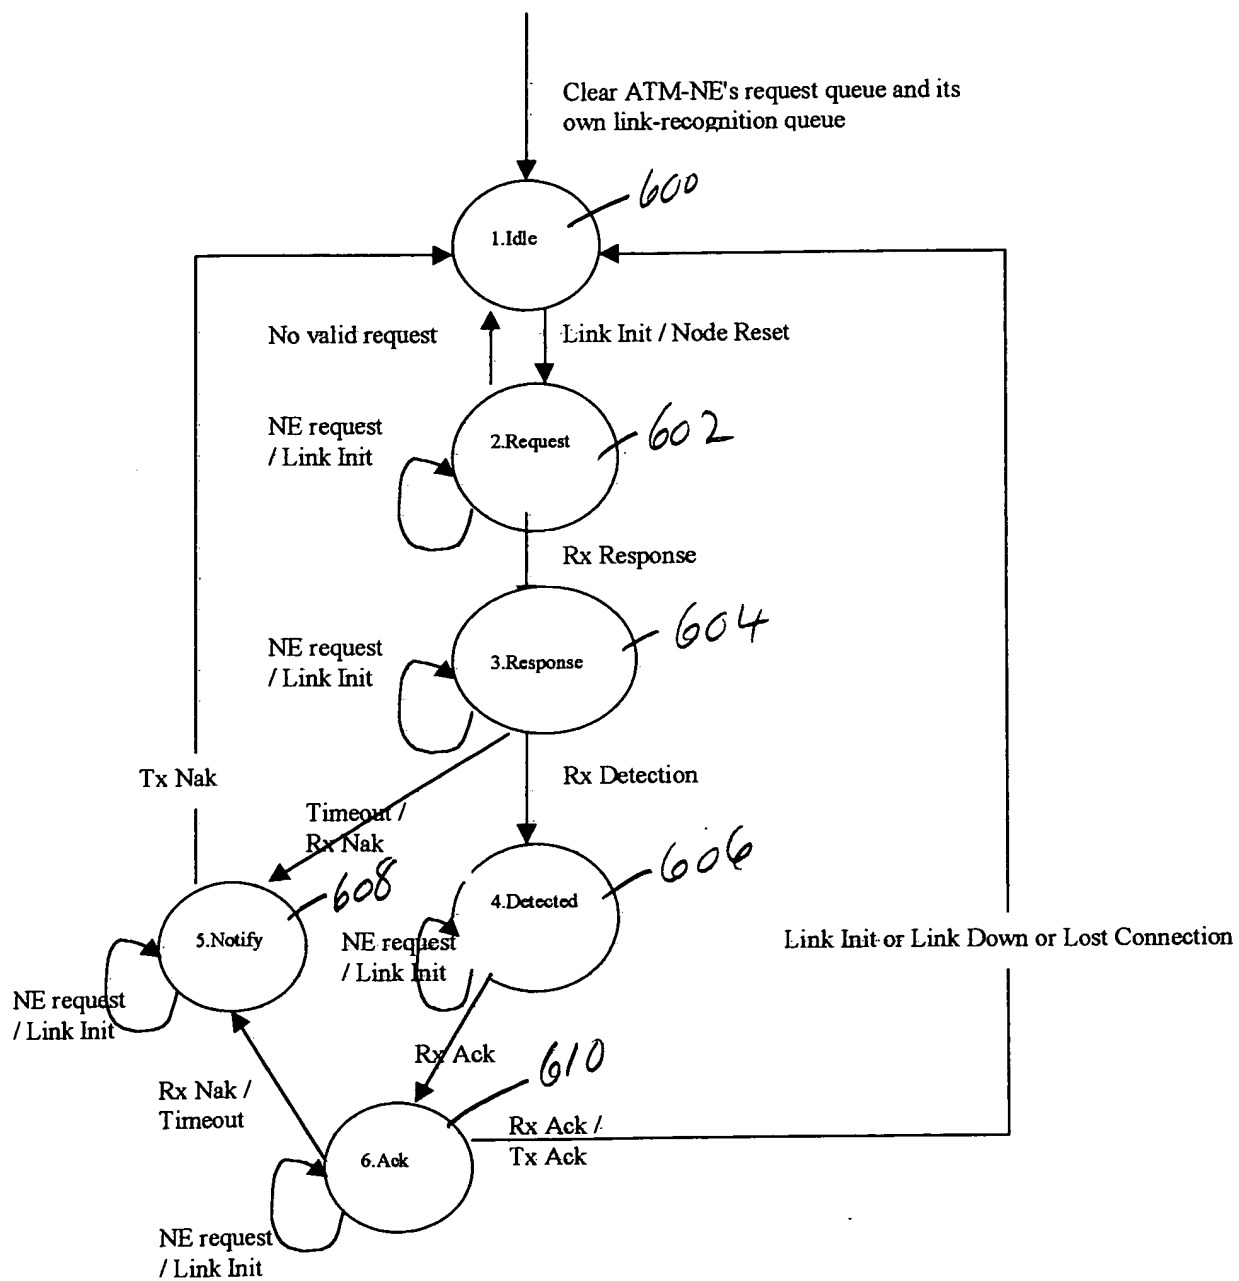


Figure 6:

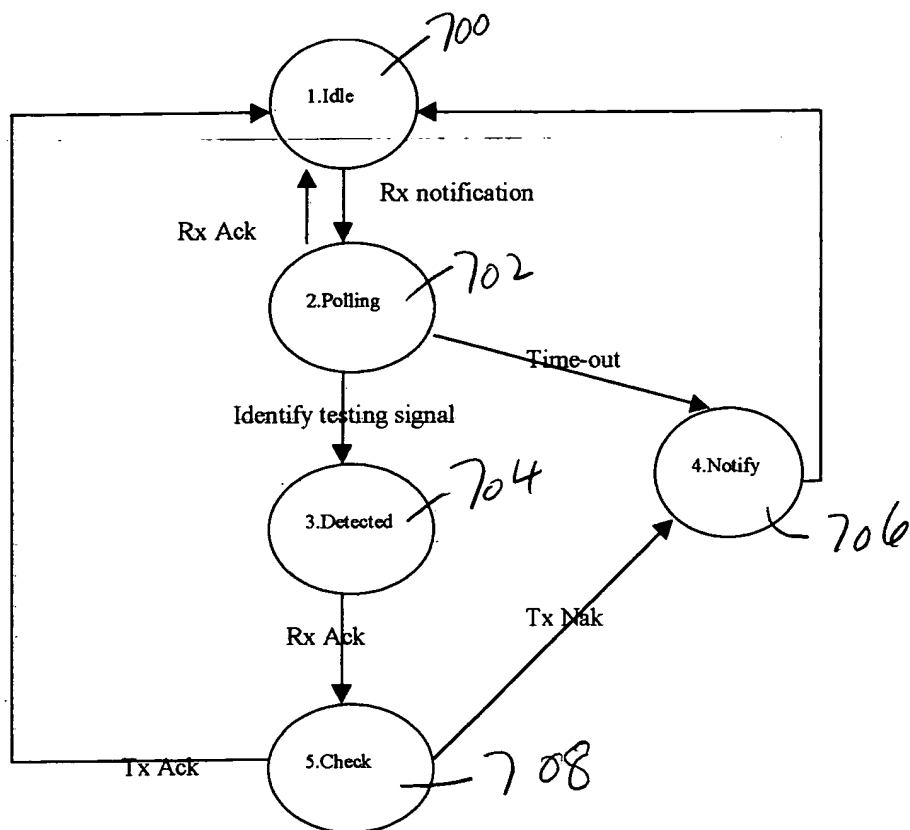


Figure 7

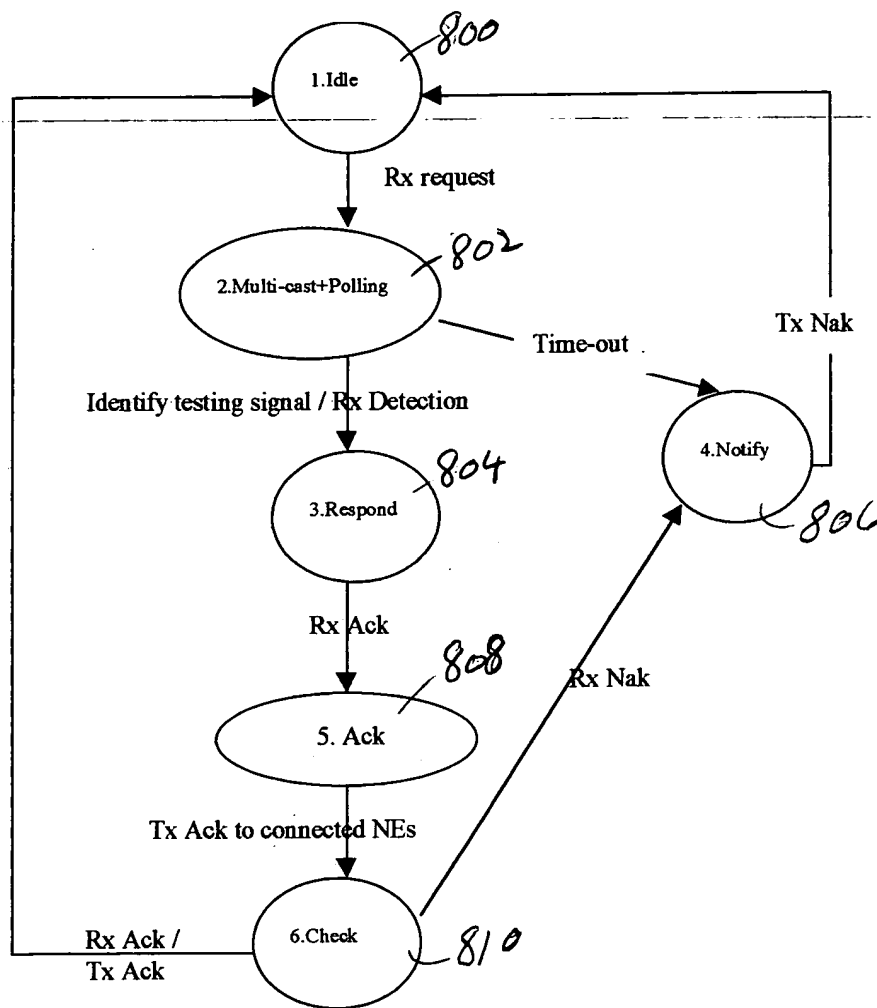


Figure 8